

S&K AUTOMATION, LLC



DEADMAN HANDLE BALL VALVES

SERIES **2200SRL** 1000 PSI 2-Way S.S. FNPT Ball Valve
w/Deadman Spring Return Lever



Deadman Spring Return Lever 2-Way 2-Piece Ball Valve, Full Port
1/4" to 2"

- 2-Piece, Full Port
- CF8M Type 316 Investment Cast Body
- Temperature range -40° F to 450° F
- Working Pressure to 1000 Psi 1/4" - 2"
- Live Loaded High Cycle Stem Packing
- Blow-Out Proof Stem
- Adjustable Spring Return Lever
- Anti-Static Design

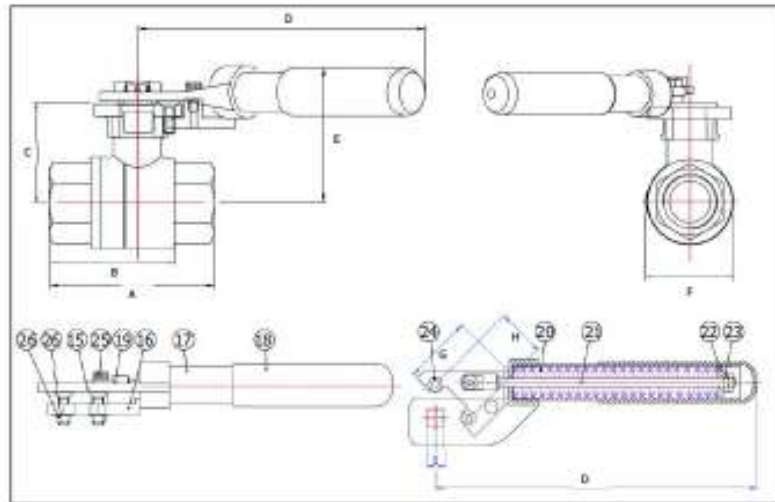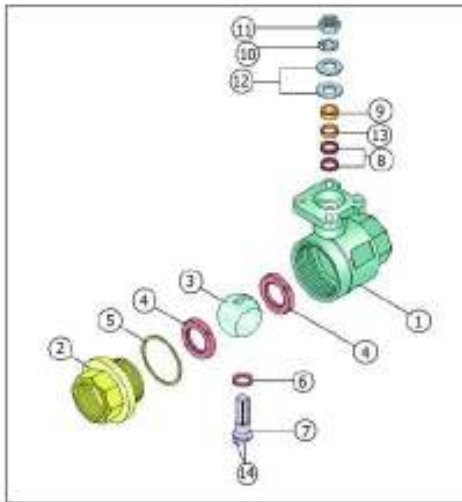

Valve Materials

NO.	PART NAME	MATERIAL	No. Pcs.
1	Body	CF8M/WCB	1
2	End Cap	CF8M/WCB	1
3	Ball	SS316	1
4	Seat	PTFE	2
5	Joint Gasket	PTFE	2
6	Stem Seal	PTFE	1
7	Stem	SS316	1
8	Gland Packing	MG1241	2
9	Gland Bushing	SS304	1
10	Stop Washer	SS304	1
11	Stem Nut	SS304	1
12	Belleville Washer	SS301	2
13	Bushing	25% RTFE	1
14	Anti-Static Device	SS304	2

Handle Materials

NO.	PART NAME	MATERIAL	No. Pcs.
15	Handle Pad	SS304	1
16	Triangle Pad	SS304	1
17	Tube	SS304	1
18	Handle Sleeve	Vinyl	1
19	Sub. Shaft	SS304	1
20	Spring	SWP	1
21	Shaft	SS304	1
22	Washer	SS304	1
23	Nut	SS304	2
24	Bolt	SS304	2
25	Screw	SS304	1
26	Washer	SS304	2
27	Nut	SS304	2

Size	A	B	C	D	E	F	G	H	I	ISO 5211
1/4"	2.56	1.97	1.52	6.30	2.31	1.46	1.67	1.16	0.35	F03/F04
3/8"	2.56	1.97	1.52	6.30	2.31	1.46	1.67	1.16	0.35	F03/F04
1/2"	2.56	1.97	1.52	6.30	2.31	1.46	1.67	1.16	0.35	F03/F04
3/4"	2.94	2.23	1.81	6.30	2.60	1.69	1.67	1.16	0.35	F03/F04
1"	3.46	2.58	2.23	6.30	3.02	2.05	1.72	1.39	0.43	F04/F05
1 1/4"	4.02	3.03	2.40	6.30	3.19	2.48	1.72	1.39	0.43	F04/F05
1 1/2"	4.33	3.43	3.05	8.27	3.84	2.87	2.58	1.95	0.55	F05/F07
2"	4.92	3.84	3.35	8.27	4.14	3.54	2.58	1.95	0.55	F05/F07

S&K AUTOMATION LLC, Plymouth, Minnesota.

Call 763-476-1013

<http://www.sk-automation.com/ballvalves/deadmanhandle.html>